


两片式螺纹球阀 TWO-PIECE THREADED BALL VALVE

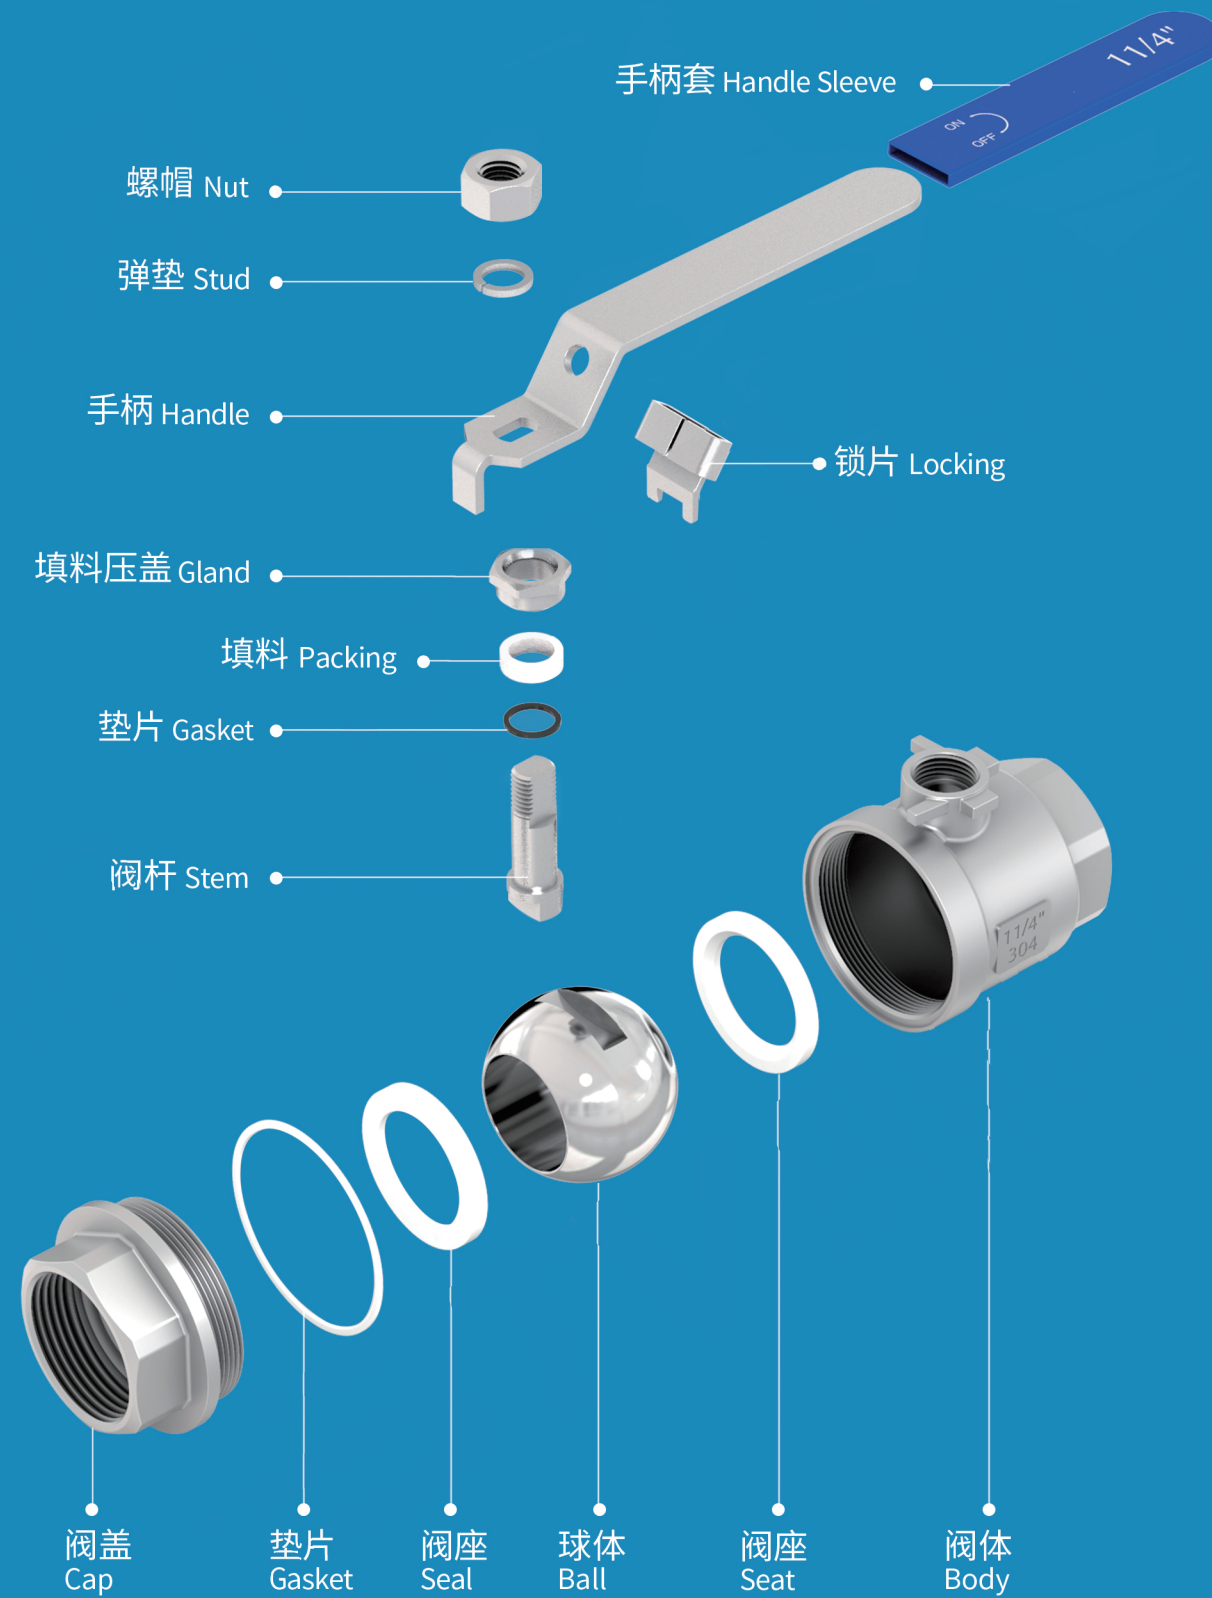

2PC螺纹 参数

两片式(重型) 螺纹球阀

适用水、蒸汽、油、粘性介质

90度开关，快速顺畅

阀杆防飞出设计；可升级日本大金密封

硅溶胶精密铸造，铸件通过德国 TÜV 认证

标准规范


压力/温度标准：ASME B16.34

制造标准：ASME B16.34

结构长度标准：厂标

试验标准：API598

连接方式标准：BSP/BSPT/NPT/G/Rp/Rc

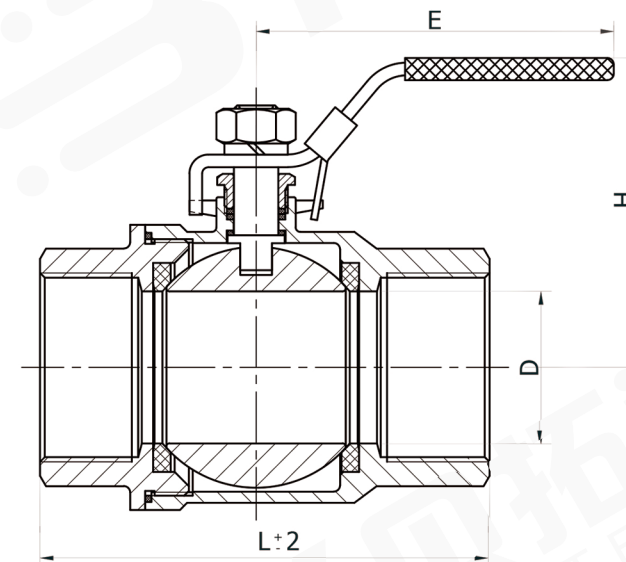

主要尺寸 Dimension

Unit: mm

SIZE	1/4"	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
L	56	56	63	75	86	99	107	122	144	165	200
D	12	12	15	20	25	32	38	49	65	78	100
H	50	50	55	65	75	80	90	100	130	145	161
E	90	90	100	105	145	155	165	185	202	245	322
B	26	26	26	31.5	39	47.2	55	68	83	102	121

更适用紧密管道
狭小空间

